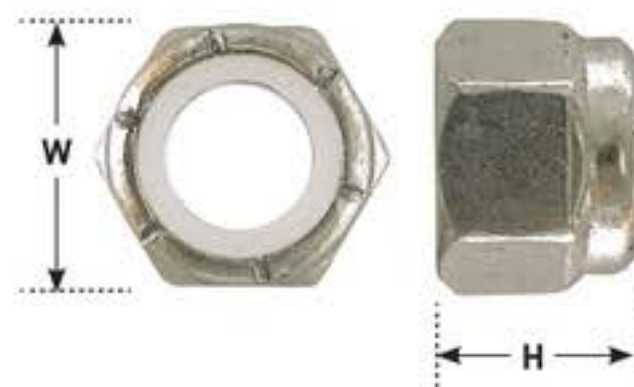


5034
Series**paulin** NYLON INSERT LOCK NUTSPART CLASS #
800BG

NYLON INSERT LOCK NUTS have a nylon insert. These prevailing torque lock nuts offer excellent vibration resistance and positive locking under severe shock. 18.8 stainless steel fasteners have excellent corrosion resistant qualities and are an excellent choice for general use and outdoor applications. Nuts may be reused.

W = Width (Across Flats) **H** = Height**ORDER BY ITEM (PACKAGE) NUMBER****Coarse Thread**
☐ Product not available in this pack size

18.8 STAINLESS STEEL									
Diameter-Pitch	Approx. Weight (lb) /100 pcs	W	H	Clamshell #	Qty	Handy Pak #	Qty	Black Box #	Qty
4-40	0.125	1/4	9/64	—	—	—	—	5034-004	100
6-32	0.235	5/16	11/64	848-201	8	—	—	5034-006	100
8-32	0.270	11/32	15/64	848-202	6	—	—	5034-008	100
10-24	0.320	3/8	15/64	848-203	6	—	—	5034-010	100
10-32	0.400	3/8	15/64	848-204	6	—	—	5034-011	100
1/4-20	0.790	7/16	5/16	—	—	—	—	5034-014	100
5/16-18	1.100	1/2	11/32	—	—	—	—	5034-016	100
3/8-16	1.760	9/16	29/64	—	—	—	—	5034-018	100
7/16-14	2.000	5/8	29/64	—	—	—	—	5034-020	50
1/2-13	3.200	3/4	19/32	—	—	—	—	5034-022	50
5/8-11	6.670	15/16	3/4	—	—	—	—	5034-024	25
3/4-10	10.000	1-1/16	7/8	—	—	—	—	5034-026	20
7/8-9	15.000	1-1/4	63/64	—	—	—	—	5034-028	10
1-8	20.000	1-7/16	1-3/64	—	—	—	—	5034-030	10

Fine Thread

18.8 STAINLESS STEEL									
Diameter-Pitch	Approx. Weight (lb) /100 pcs	W	H	Clamshell #	Qty	Handy Pak #	Qty	Black Box #	Qty
1/4-28	0.785	7/16	5/16	—	—	—	—	5034-114	100
5/16-24	1.100	1/2	11/32	—	—	—	—	5034-116	100
3/8-24	1.740	9/16	29/64	—	—	—	—	5034-118	100
1/2-20	4.000	3/4	19/32	—	—	—	—	5034-122	50
5/8-18	8.400	15/16	3/4	—	—	—	—	5034-124	25
3/4-16	11.875	1-1/16	7/8	—	—	—	—	5034-126	20