Snipe Nose Side Cutting Pliers
Stork Beak Pliers, DIN ISO 5745

26

Elastic tips: stable even when twisted

- distortion-tolerant, flexible precision tips
- half-round, long, pointed jaws
- hardened cutting edges (approx. 61 HRC) for soft, medium hard and hard wire
- vanadium steel; forged, multi-stage oil-hardened

26 11 200 S1
Integrated stripping hole in cutting blade. Strips 12 AWG wire

26 12 200 T BKA / 26 22 200 T BKA*
Pliers with integrated tether attachment point for tool drop protection system









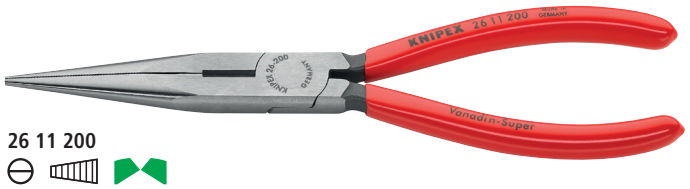

26 11 200

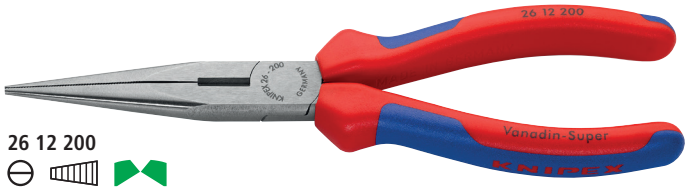

26 12 200

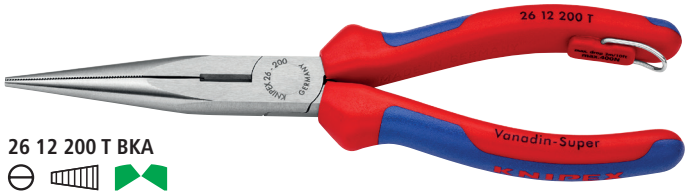

26 12 200 T BKA

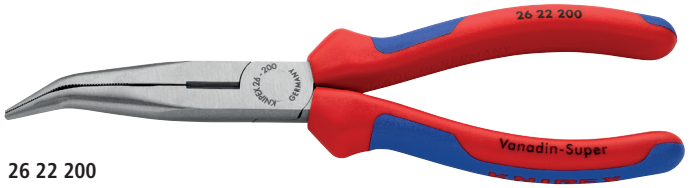

26 22 200
40°

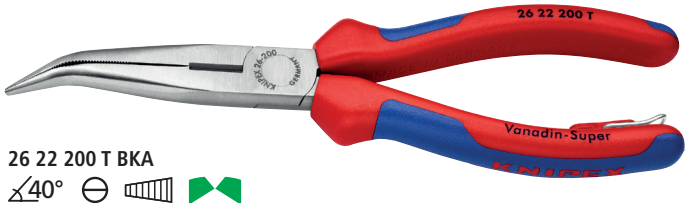

26 22 200 T BKA
40°

Product Number	Packaging	↔ Inch mm		Pliers	Head	Handles	Cutting capacities Ø Inch Ø mm	Ø Inch Ø mm	Dimensions L3 Inch mm	L4 Inch mm	T1 Inch mm	W3 Inch mm	W4 Inch mm	T2 Inch mm	lbs
26 11 200	X	8 200		black atramentized	polished	plastic coated	1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.38
26 11 200 S1	X	8 200					1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.38
26 12 200	X	8 200		black atramentized	polished	multi-component grips	1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.44
26 12 200 T BKA	X	8 200		black atramentized	polished	multi-component grips, integrated tether attachment point	1/8 3.2	3/32 2.2	2 7/8 73.0	-	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.45
26 21 200	X	8 200	40°	black atramentized	polished	plastic coated	1/8 3.2	3/32 2.2	2 7/8 73.0	29/32 23.0	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.38
26 22 200	X	8 200	40°	black atramentized	polished	multi-component grips	1/8 3.2	3/32 2.2	2 7/8 73.0	29/32 23.0	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.43
26 22 200 T BKA	X	8 200	40°	black atramentized	polished	multi-component grips, integrated tether attachment point	1/8 3.2	3/32 2.2	2 7/8 73.0	29/32 23.0	3/8 9.5	45/64 18.0	1/8 3.0	3/32 2.5	0.45

*Learn more about our tethered tool system on pages 207-211